


1. 791STV Square Trim Kit in Vintage (5-3/4") and 793RTB Riser Trim in Black with 789VRL Valor Red Brick Liner
2. 792FTZ Floating Trim Kit in Bronze (5"), 794TBB Trimmable Backing Plate (available in black only), 797FSB Framed Safety Screen with 788FBL Black Fluted Liner
3. 790FTV Floating Trim Kit in Vintage Iron (2") with 788FBL Black Fluted Liner (shown with the Beachside Rock Firebed)
4. 791STB Square Trim Kit in Black (5-3/4") with 786LSL Ledgestone Liner

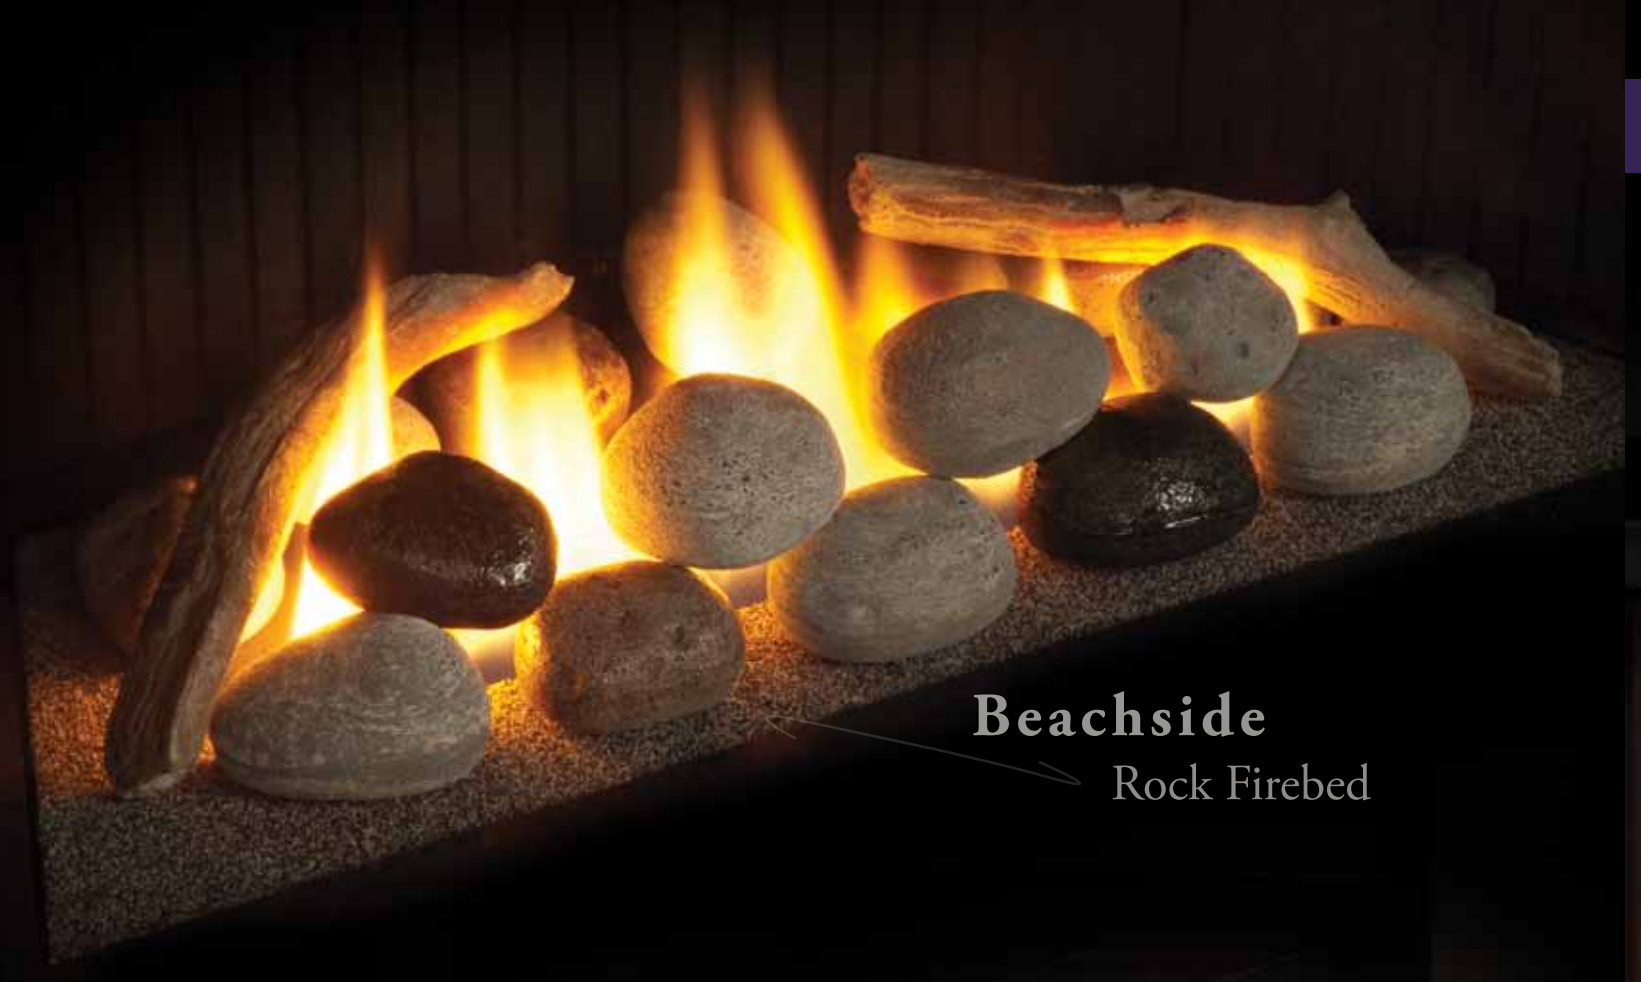

Beachside
Rock Firebed

Beachside Rock & Traditional Log

Fuel bed options include our traditional log bed and the Beachside Rock firebed.

Brick Liner Options - There are three brick liner sets to choose from: Valor Red Brick, Ledgestone and Black Fluted Liner.

Standard with every brick set, base bricks cover the bottom of the engine (in front of the log grate) providing continuity within.



THE VALOR LEGEND G4

Introducing the Legend G4, our latest addition to the Valor insert family. Considered the “big brother” to our highly successful Legend G3 Insert, the G4 is a synthesis of distinct design and efficient, radiant heating performance.

At Valor, we believe the process of updating your living space esthetics should include a significant upgrade in fireplace technology and efficiency. The G4 pursues this concept with features including:

Valor Distinction - Contemporary steel trims create the perfect frame, showcasing spectacular flames within. Positioned inside the fireplace, engine controls are effectively “hidden” eliminating the need for space-consuming louvers. Both features are designed to further increase the overall viewing area and provide a seamless transition on surrounding wall surfaces.

Radiant Heat - Like heat from the sun, Valor fireplaces are designed to maximize radiant heat output. Travelling at the speed of light, radiant energy continuously warms objects in its path. When warming the human body, radiant heat satisfies your comfort needs with up to 25% less overall energy compared to forced air systems.

VDR (Valor Dynamic Restrictor) - Engineered to automatically adjust secondary combustion air within the fireplace, our brand new “**VDR Technology**” increases thermal efficiencies and radiant heat output - a Valor G4 exclusive. *(Patent Pending)*

No Power, No Problem - Valor Radiant Gas Fireplaces are fully functional heaters that don't require electricity (AC) for steady, efficient operation. Our fireplaces provide the perfect mixture of radiant and convective heat eliminating the need for a noisy, inefficient fan.



ValorStat Max Remote Control & Valor SmartPilot System *(Standard w/ Purchase)*

The **ValorStat Max** Remote Control gives you the power to select, adjust and program the desired temperature that you want. Timer and Thermostat mode help save energy and lower your home heating costs.

If the optional 795CFK fan kit is installed, the ValorStat Max provides full control turning the fan on and off, as well as adjusting the fan speed settings.

Electronic Pilot Ignition: The ValorStat Max also has the ability to turn your pilot light **ON** and **OFF** from the programmable handheld remote.

Safety Feature: The Valor SmartPilot System automatically shuts down if there is no activity after 5 days.



Legend G4 with Log Set, 788FBL Black Fluted Liner and 792FTZ Floating Trim Kit in Bronze (5")



Displayed with Solus Decor - solusdecor.com

Valor LEGEND G4 SERIES

Please refer to the complete Legend G4 product manual before installation - valorfireplaces.com

G4 FIREPLACE COMPONENTS

ENGINES	780IN	DV Legend G4 Engine NG (Log or Rock Set)
	780IP	DV Legend G4 Engine LPG (Log or Rock Set)
FUEL BEDS	781RSK	Rock Set Kit (must select either log or rock for 780 Engine only)
	782LSK	Log Set Kit (must select either log or rock for 780 Engine only)
LINERS	786LSL	Ledgestone Liner
	788FBL	Black Fluted Liner
	789VRL	Valor Red Brick Liner
TRIMS RISERS ACCESSORIES	790FTV	2" Floating Trim Kit in Vintage Iron (25-5/16"h X 36"w)
	791STB	5-3/4" Square Trim Kit in Black (28-11/16"h X 43"w)
	791STV	5-3/4" Square Trim Kit in Vintage Iron (28-11/16"h X 43"w)
	792FTV	5" Floating Trim Kit in Vintage Iron (27-5/8"h X 40-5/8"w)
	792FTZ	5" Floating Trim Kit in Bronze (27-5/8"h X 40-5/8"w)
	793RTB	Riser Trim in Black (2-1/2" high)
	793RTV	Riser Trim in Vintage Iron (2-1/2" high)
	794TBB	Trimmable Backing Plate in Black (31"h X 46"w)
	795CFK	Circulating Fan Kit
	796ALP	Adjustable Leveling Platform
	797FSB	Framed Safety Screen
	1265WSK	Optional Wall Switch Kit
GV60PAK	Power Adaptor Kit for the ValorStat Max	

G4 LINERS

VALOR RED BLACK FLUTED LEDGESTONE




CONSUMER AWARENESS - Engineered to provide radiant heat for your home, fireplace surfaces (in particular the glass window) will get hot during operation. Objects should be kept a safe distance away from the fireplace at all times. Never allow children to touch the glass. Adult supervision is required. We recommend using safety screen if you have children in the home. For additional hearth safety information visit - www.valorfireplaces.com/safety (&) www.hpba.org.

ABOUT OUR EFFICIENCY RATINGS - All Valor product literature is published using recognized Canadian and US government test methods for determining energy efficiency performance. This ensures our products will perform in your home as rated. Beware of misleading “steady state” efficiency claims made by manufacturers using their own “in-house” test methods. Examples include alterations to venting and installation restrictions which in turn produce false ratings.



Visit www.valorfireplaces.com for more information.

G4 DIRECT VENTING

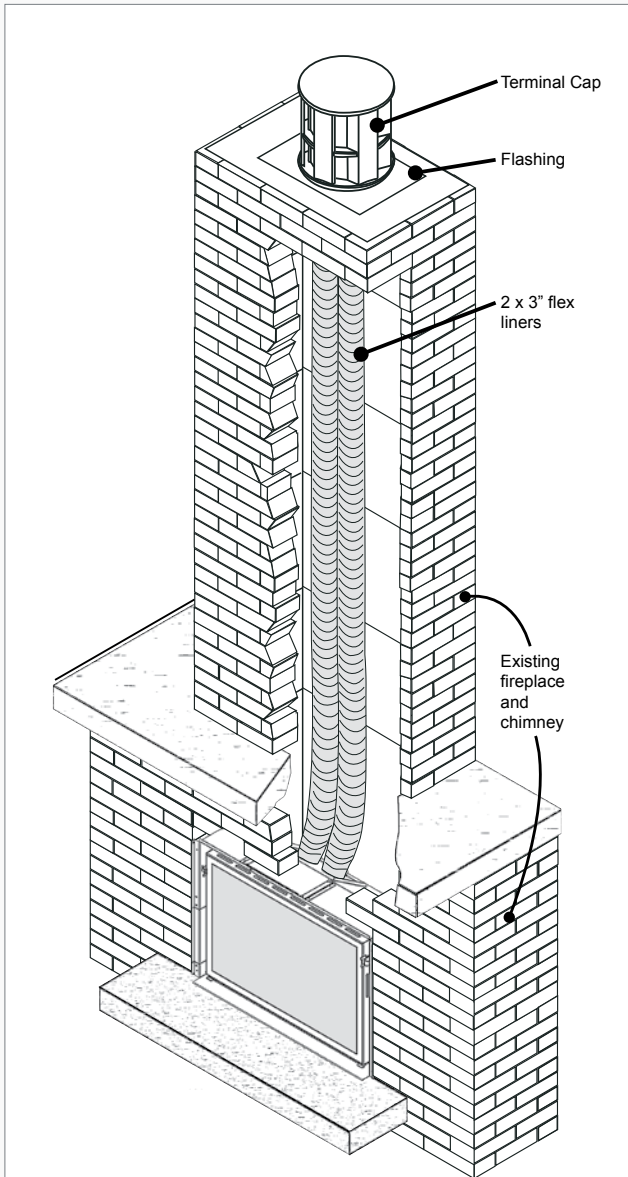

Please Note: The maximum vertical vent run for the Legend G4 is 40'. The minimum is 10'.

G4 PRODUCT DIMENSIONS

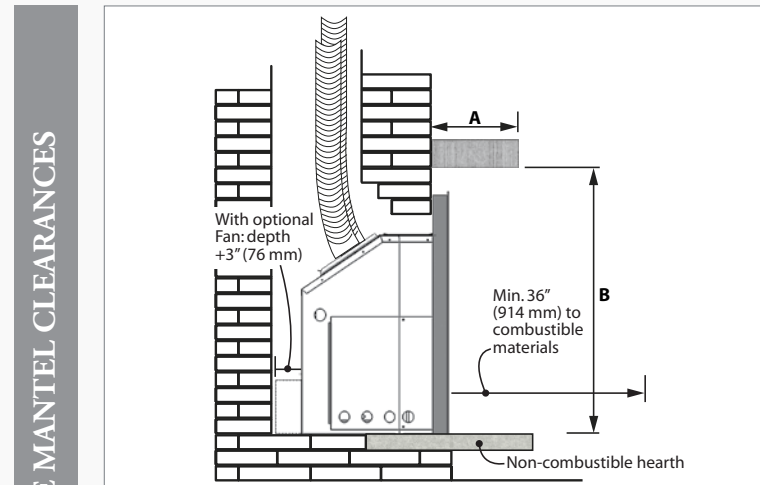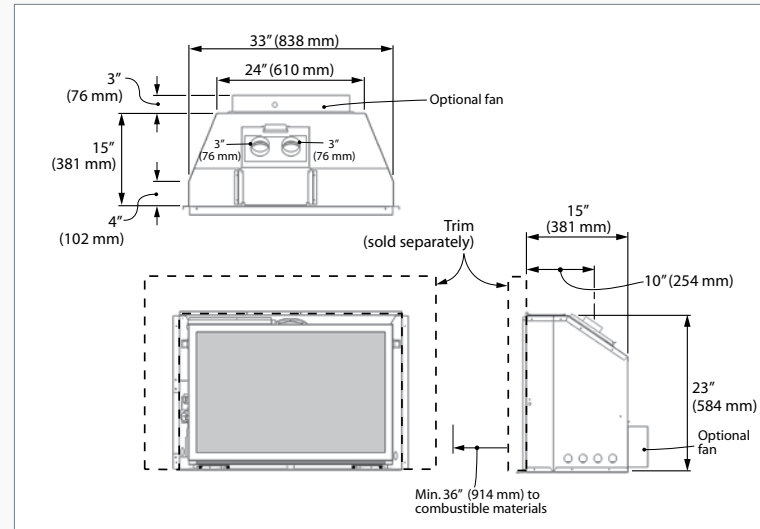



Mantel Projection A	1" (25 mm)	4" (101 mm)	8" (203 mm)	14" (355 mm)
Mantel Height B*	34" (864 mm)	36" (914 mm)	38" (965 mm)	40" (1016 mm)

*Measure taken from the underside of the mantel to finished hearth or surface that the unit is sitting on.

MODEL/FUEL

Model	Fuel	Max. Input BTU/hr	Min. Input BTU/hr	Log/Rock Set	Fan Option	EnerGuide P4 Rating**	AFUE**	Max. Output (w/out fan) BTU/hr **
780IN	NG	30,000	6,500	Log/Rock	Yes	67.3%	70.1%	21,882
780IP	LPG	28,000	14,500	Log/Rock	Yes	64.3%	67.1%	20,115

** Ratings and Outputs have been determined without a fan/blower, using the CSA P4.1-02 test method



All product information is accurate at time of printing and is subject to change. Note: Printed images may vary from actual product. Patent Pending