

HEMI 26
MATCH LIT NG & LP

Fire is beautiful and also dangerous if not handled properly. Please have a qualified gas fitter setup and install this product according to local codes.

This product has been tested and certified by Labtest Certification Inc. as being safe, as long as these **minimum clearances** to adjacent materials are maintained.

FOR OUTDOOR USE ONLY

NORTH AMERICA SPECIFICATIONS

Gas type: Natural Gas Propane/But.
Gas press: 3.5" - 7.0" w.c. N/A
BTU / kWh: 60,000/11.7 76,000/22.5

ANSI Z21.97-2014
CSA 2.41-2014



UK & EUROPEAN SPECIFICATIONS

Gas type: Natural Gas Propane/But.
Gas press: G20-20mbar G30-30mbar
Heat Out: G20/11.7 G30/22.5

EN 509:2000
EN 60335-1:2001






CONCRETE SPECS

Strength: 10,000 psi (proprietary)
Weight: 70 lbs / 32 kg

JOB / ORDER
Name or Number:

Signature & Date:

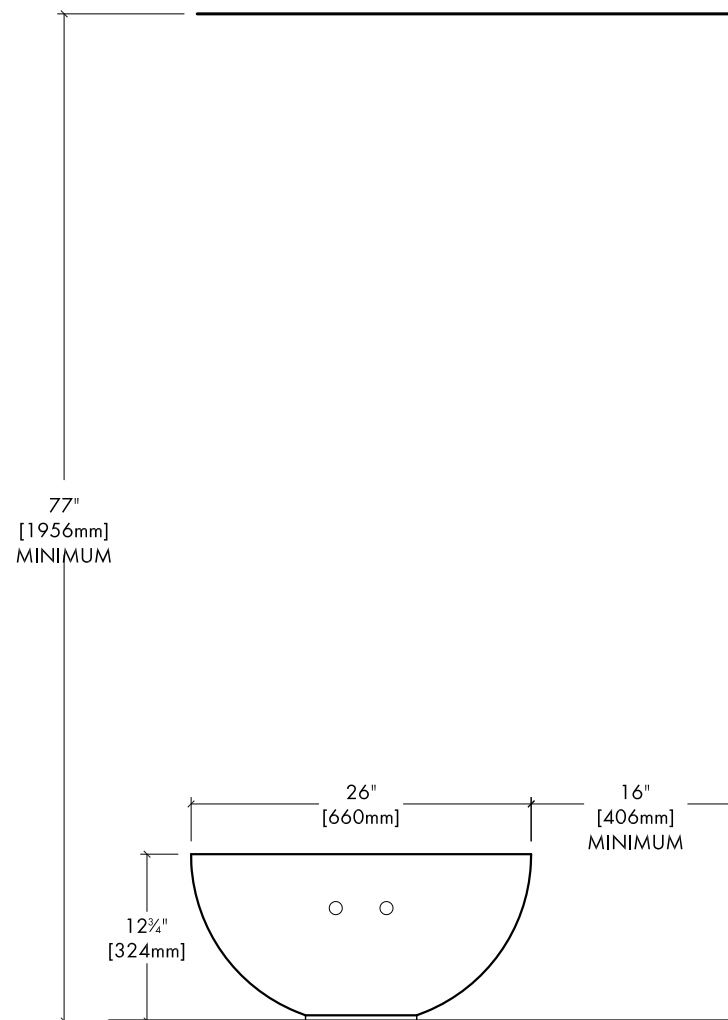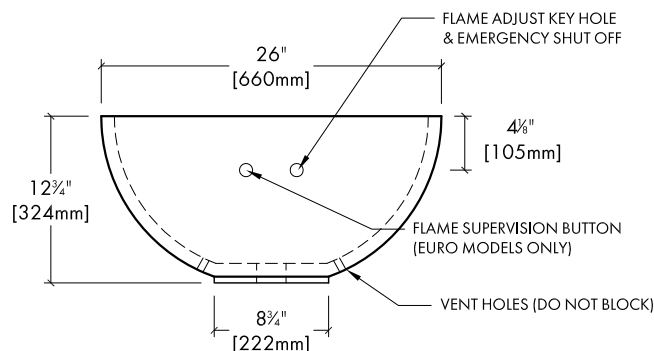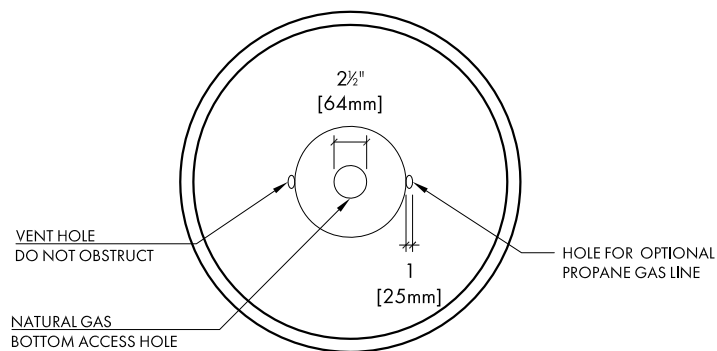

CLEARANCES to ADJACENT MATERIALS