

LINEAR MATCH LIT

NG & LP

Fire is beautiful and also dangerous if not handled properly. Please have a qualified gas fitter setup and install this product according to local codes.

This product has been tested and certified by Labtest Certification Inc. as being safe, as long as these minimum clearances to adjacent materials are maintained.

FOR OUTDOOR USE ONLY

NORTH AMERICA SPECIFICATIONS

Gas type: Natural Gas Propane
Gas press: 3.5" - 7.0" w.c. N/A
BTU / kWh: 108,000/31 108,000/31

ANSI Z21.97-2014 CSA 2.41-2014



UK & EUROPEAN SPECIFICATIONS

Gas type: Natural Gas Propane/But.
Gas press: G20- 20 mbar G31- 37 mbar
Heat Out: G20/31 G31/31


EN 509:2000 EN 60335-1:2001 **C**€ 0558

CONCRETE SPECS

Strength: 10,000 psi (proprietary) Weight: 150 lbs / 68 kg

JOB / ORDER Name or Number:

Signature & Date:

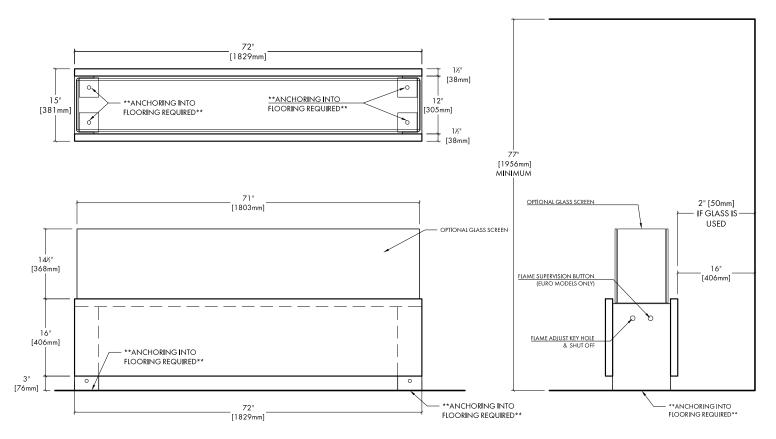

CLEARANCES to ADJACENT MATERIALS