

solus

Fire Features

LINEAR DOUBLE HIGH
MATCH LIT NG & LP

Fire is beautiful and also dangerous if not handled properly. Please have a qualified gas fitter setup and install this product according to local codes.

This product is safe, as long as these minimum clearances to adjacent materials are maintained.

FOR OUTDOOR USE ONLY

NORTH AMERICA SPECIFICATIONS

Gas type: Natural Gas Propane
Gas press: 3.5" - 7.0" w.c. N/A
BTU / kWh: 108,000/31 108,000/31

CERTIFICATION PENDING

UK & EUROPEAN SPECIFICATIONS

Gas type: Natural Gas Propane/But.
Gas press: G20- 20 mbar G31- 37 mbar
Heat Out: G20/31 G31/31

CERTIFICATION PENDING


CONCRETE SPECS

Strength: 10,000 psi (proprietary)
Weight: 150 lbs / 68 kg

JOB / ORDER

Name or Number:

Signature & Date:

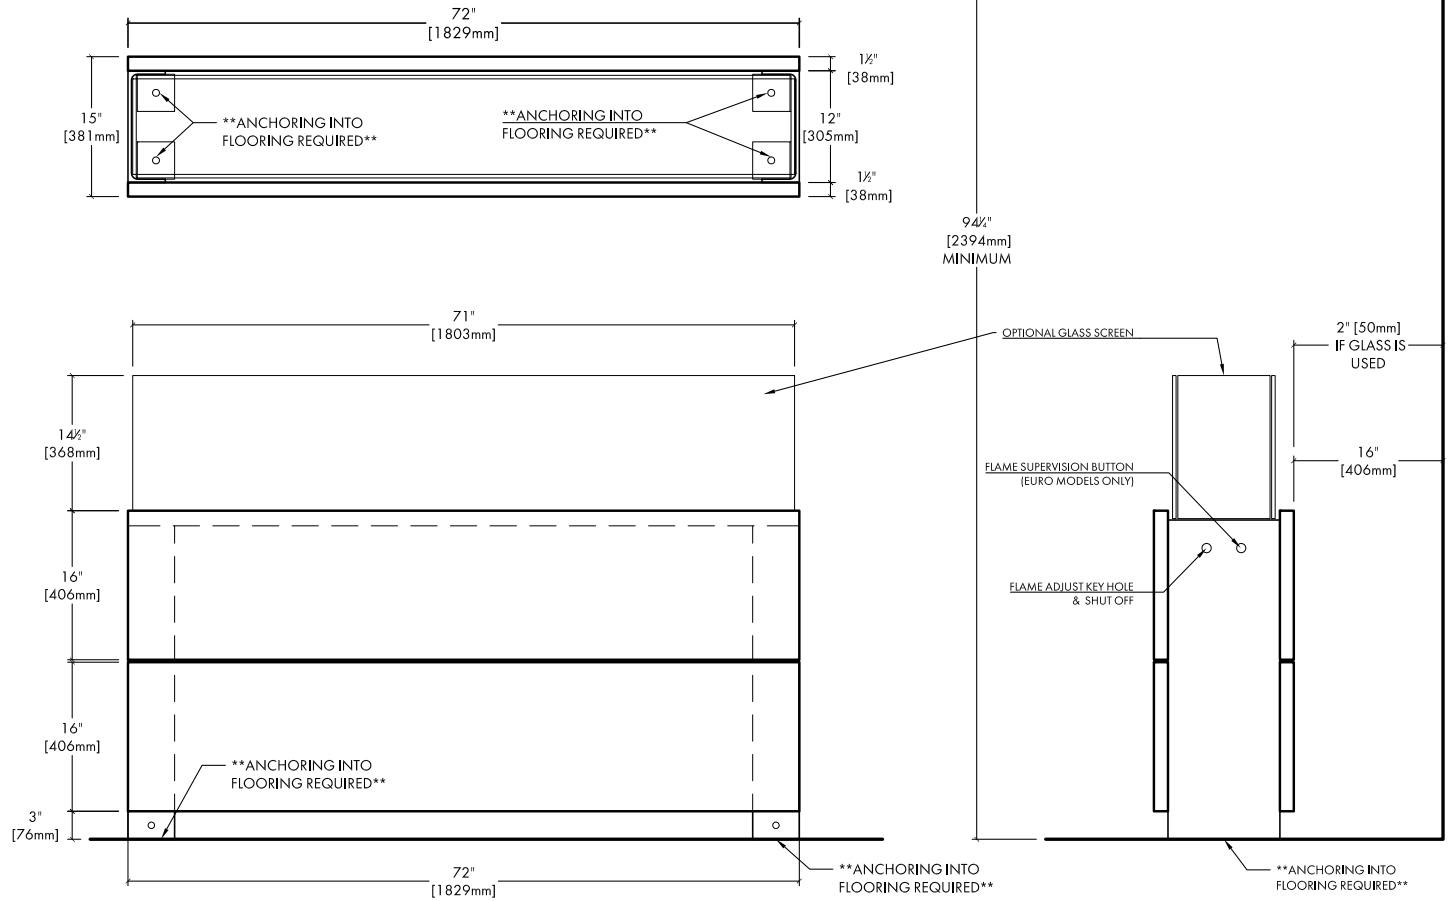

CLEARANCES to ADJACENT MATERIALS