PLATINUM SMART-HEAT™ ELECTRIC

Available in black and white, our Platinum Smart-Heat™ Electric heater is specifically suited for low-clearance and design-focused spaces. This slim-line, stainless-steel uni spreads comfort evenly in its space, all while minimizing ligh emission and blending seamlessly into the background with our recess mounting solutions.



2300W SERIES
BLACK | WHITE

3400W SERIESBLACK | WHITE





SPECIFICATIONS

Reference the specification guide below to help you select the correct solution for your needs.

MODEL NUMBER	2300W SERIES	3400W SERIES
PRODUCT CODES	BH0320003 BH0320007	BH0320005 BH0320008
FUEL TYPE	ELECTRIC	ELECTRIC
COLOR	BLACK WHITE	BLACK WHITE
HEAT AREA	65FT ²	108FT ²
RATED CURRENT **	230 - 240V/9.6A	230 - 240V/14.2A
MINIMUM FLOOR CLEARANCE	WALL 72" CEILING 96"	WALL 72" CEILING 96"

MOUNTING OPTIONS

CEILING MOUNT	✓	✓
CEILING RECESS KIT PRODUCT CODES	BH3130017	BH3130027
WALL MOUNT	✓	✓
RECESSED FLUSH MOUNT	✓	\checkmark
CEILING POLE MOUNT	✓	✓
CEILING POLE (2') PRODUCT CODE	BH3130023	BH3130023
CEILING POLE (4') PRODUCT CODE	BH3130024	BH3130024
FREESTANDING	-	-

CONTROL OPTIONS

ON OFF	✓	✓
ON OFF PRODUCT CODE	BH3130010-1	BH3130010-1
DIMMER	✓	✓
DIMMER PRODUCT CODE	BH3130011-1	BH3130011-1
MASTER REMOTE *	✓	✓


Measurements displayed within this document are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations.

All measurement in this document are displayed in inches.

DIMENSIONS


With a wide range of sizes available, find the ideal heater to suit your outdoor space.

PROFILE



CEILING RECESS

CEILING RECESS FRAME 2300W



CEILING RECESS FRAME 3400W





MINIMUM CAVITY OPTION 1



MINIMUM CAVITY OPTION 2







^{*} Control up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 100ft of heaters.

MOUNT OPTIONS


With a wide array of mounting options, Bromic offers solutions to compliment any decor and provide functionality for ambiance and comfort.


CEILING & WALL MOUNT

CEILING POLE CLEARANCE FRONT DOWN MOUNT ANGLE MOUNT CLEARANCE WALL MOUNT CLEARANCE 10" (2300W) 18" (3400W) 10" (2300W) 18" (3400W)

WALL BRACKET (INCLUDED)

CEILING BRACKET (INCLUDED)





HEATING REACH

Creating ideal comfort levels, Bromic heaters offer a variety of heat distribution options to suit your outdoor heating needs.


HEAT AREAS

2300W SERIES

HEATING APPROXIMATELY 65FT² 2300W HEATING POWER

3400W SERIES

HEATING APPROXIMATELY 108FT² 3400W HEATING POWER

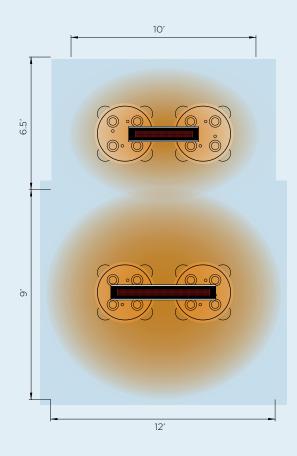

CONTROL OPTIONS








ON | OFF CONTROL

DIMMER CONTROL

MASTER REMOTE



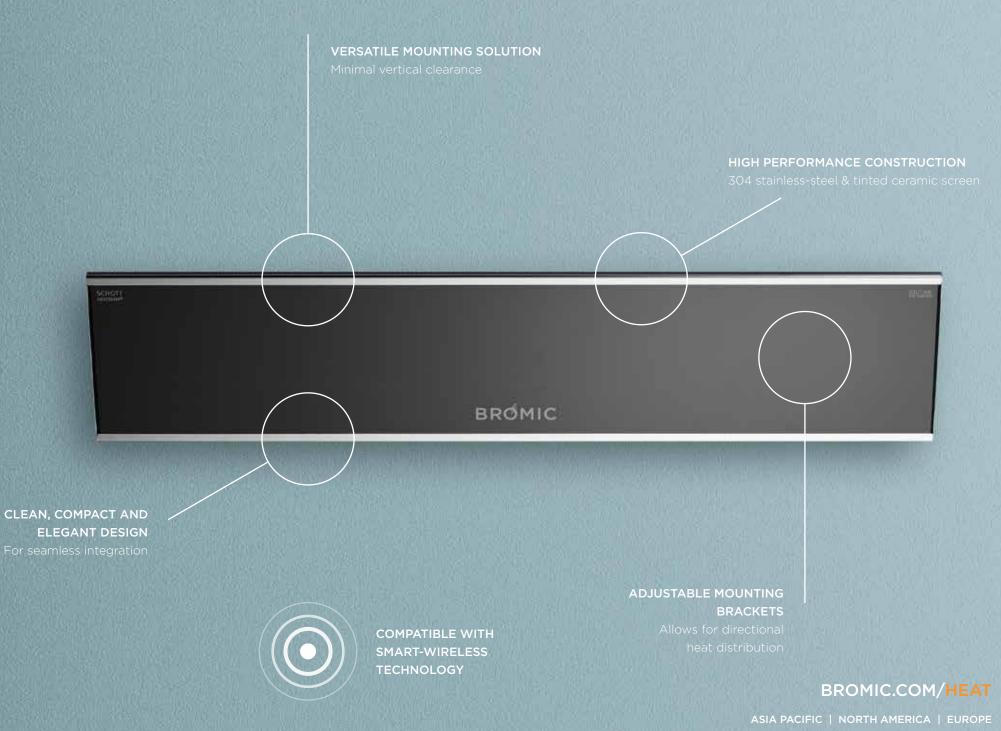

Bromic pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.